GENERAL TOOL EQUIPMENT LINE



0

GENERAL TOOL ent line

flat saws




LOW HP Flat Saw

FS200-13G

- 13 HP
- 18" Capacity
- 245 lbs.

This Low HP Flat Saw was designed to endure every day use while providing straight and smooth cuts. Our 18" blade capacity saw has a 13 HP Honda® engine and is built with a heavy-gauge steel frame for reliable cutting. It features dual blade arbors to place blade on the left or right side of saw. Large screw type depth control locks to insure consistent cutting depth. Ideal for slab cutting, contraction joints, patch repairs in asphalt, traffic loop installation and trenching.



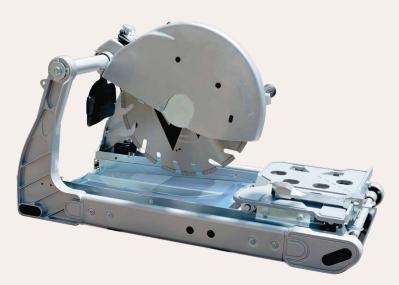

MASONRY Saw*

MDE350

- 3 HP
- 14" Capacity
- 75 lbs.

The MDE350 **Dry Masonry Saw** features a powerful 3 HP carbon brush motor that provides unrelenting torque at low amperages. A 14" blade capacity for brick/block and general purpose applications. A Dry cutting masonry saw with optional stand and it can be used wet with our optional wet kit. Solid steel construction with a wide back design that accommodates materials up to 8" x 8" x 16".

Blade Capacity	14"
Weight	75 lbs.
Horse Power	3HP
Arbor Size	1"
RPM	3,600
Max Cut	Depth 5"
Rip Cutting	16"
Thermal Protection	Equipped
Motor	115V/60Hz

*General Tool offers a wide range of High Speed blades for Masonry and cut-off saws.

CORE DRILLS AND SAWS THAT HAVE BEEN TESTED FOR THEIR QUALITY AND DURABILITY.

gtdiamond.com

GENERAL TOOL EN

Drills Core

HAKKEN[®] Core Drills

with most powerful Japanese motors in its class







Power 120V 15A Rated Current Max Output 2.4kw (3.2HP) Max Bit Capacity 8" Spindle Thread 1-1/4"-7 Column Thickness 1-15/16" Stand Height 31-7/8" Carriage Travel 19-7/8" Anchor Base 7" W x 8.5" L Clutch Type Slip 700 RPM (No Load) Speed Weight 40.8 lbs. (18.5kg)

• Double insulated construction Water valve swivels 360 degrees

One-year limited warranty

Spindle thread size 1 1/4"-7 (industry standard)

• Engineered for both vertical and horizontal drilling · Light weight drill is easy to carry and lift for wall drilling Roller slide carriage provides smooth drilling with low friction

• 4 adjustable leveling screws for drilling uneven surfaces

Motor comes with slip clutch that can be easily adjusted from outside the motor

FEATURES:



ZENESIS

Rated Current Max Output Max Bit Capacity Spindle Thread Column Thickness Stand Height Carriage Travel Anchor Base Clutch Type Speed Weight

20A 2.4kw (3.2HP) 12" 1-1/4"-7 2-5/16" 39-3/8" 24-3/8" 7.5" W x 10" L Slip 400/950 RPM (No Load) 63.8 lbs. (28.9 kg)

STANDS WE OFFER:



combination pad with

wheels for mobility



SMD16 **CORE DRILL MOTOR** WITH STANDARD STAND Power 120V

Rated Current Max Output Max Bit Capacity Spindle Thread Column Thickness Stand Height Carriage Travel Anchor Base Clutch Type Speed Weight

30A 6.4kw (8.6HP) 16" 1-1/4"-7 2-5/16" 39-3/8" 24-3/8" 7.5" W x 10" L Slip 300/800/1400 (No Load) 76 lbs. (34.5 kg)

angled

swivel

gear type angle adjustable base of Extra sub column attached, which can be rotated 360° for maximum of 120 degrees tilt easier extraction of lona cores

CORE DRILLS AND SAWS THAT HAVE BEEN TESTED FOR THEIR QUALITY AND DURABILITY.

gtdiamond.com



GENERAL TOOL ment lin

Power

Core Drills

EIBENSTOCK Hand-held Core Drills made in Germany

DRE4

- 19.5 AMP
- 6" Capacity
- 15 lbs.
- Made in Germany
- Wet or Dry use
- 3 Speed
- · Includes a carrying case with water swivel, garden hose connector, dust extraction port. 5/8-11 adapter and open wrench.
- Optional stand
- For use: plumbing, installation, fence post, railing installation, utility engineering core samples

Max Drilling Diameter 6"

Load Speed Spindle Connection Collar Diameter Carrying Case Included yes Weight

19.5AMP/110V

1. Gear 3 1/4"- 6 3/8" 0-510 RPM 2. Gear 1 3/4"- 3 1/4" 0-1150 RPM 3. Gear 1/2"- 1 3/4" 0-2500 RPM 5/8" x 11 UNC & 1 1/4" x 7UNC 60mm 15 lbs



DC3300

Width (smaller unit)	22″ –
Height (smaller unit)	39"
Width (larger unit)	27"
Height (larger unit)	49"
Weight (net)	182lbs.
Cubic Feet Per	330
Minute(CFM)	
Filter Cleaning	manual
Power	110V / 50Hz
HEPA	standard
Water Lift	91"



Width	26"
Height	66"
Weight (net)	152lbs.
Cubic Feet per Minute(CFM)	330
Filter Cleaning	manual
Power	110V / 50Hz standard
	220V / 60Hz optional
HEPA	standard
Water Lift	106"

EIBENSTOCK

DC150LM

22"
58"
132lbs.
224
manual
110V / 50Hz standard
220V / 60Hz optional
standard
106"

CORE DRILLS AND SAWS THAT HAVE BEEN TESTED FOR THEIR QUALITY AND DURABILITY.