




DIAMOND DRESSERS





EHWA DIAMOND

Since 1975, Ehwa Diamond has been growing rapidly by developing long-term partnerships with customers worldwide and continues to strive towards excellence in providing the very best customer satisfaction through product innovation and improvements.

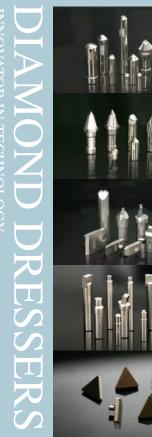

SDD (Single-point Diamond Dressers)

Manufactured by sintering a selected diamond crystal with metal matrix into a steel shank.

FDD (Forming Diamond Dressers)

Manufactured by shaping a selected high-quality diamond.

MDD (Multi-point Diamond Dressers)

Two or more selected diamonds are set in metal matrix.

IDD (Impregnated Diamond Dressers)

Manufactured by sintering selected diamond particles with metal matrix.

PCD dresssers

Manufactured by brazing Poly-crystalline diamonds.






Contents

Materials	- 4
Comparison chart by material	- 5
SDD (Single-point Diamond Dressers)	- 6
(Natural / Synthetic)	
FDD (Forming Diamond Dressers)	- 9
(Roof / Chisel / Cone)	
MDD (Multi-point Diamond Dressers)	- 12
(Natural / Blade types)	
IDD (Impregnated Diamond Dressers)	- 16
(Non-patterned IDD / Patterned IDD)	
Special tools	- 18
(Burnishing tools / PCD / Contact gauges)	

Applications	Diamond dressers
Used for straight type conventional abrasive wheels.Used for simple profile, thread and gear grinding abrasive wheels.	SDD, IDD
Used for straight type and conventional abrasive profile wheels.Able to dress complex forms and profiles with precision.	FDD, MDD
 Ideal for dressing larger and wider conventional abrasive wheels. Used for dressing conventional surface and center-less abrasive wheels. 	MDD, IDD
Used for dressing complex forms and profiles.	PCD dressers

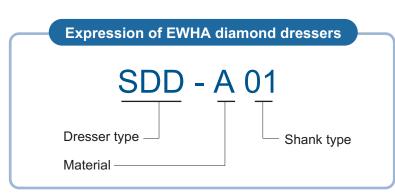



Materials



F: MONO CRYSTAL Almost same property as natural diamond Applications : SDD, FDD



Synthetic diamonds

G: CVD (Chemical Vapor Deposition) Applications : SDD, FDD, MDD



H: PCD Applications : PCD dresser



A: OCTAHEDRON Point angle 90 degree / Applications : SDD, Natural diamond-MDD



D: MACCLE Triangle shape Applications : FDD chisel type



Natural diamonds

B: DODECAHEDRON Point angle 120 degree / Applications : SDD, Natural diamond-MDD




E: SHAPE Round, Flat shape Applications : FDD chisel type



C: ELONGATED Oblong shape Applications : FDD cone type

Comparison chart by material

Property	Natural Diamond	Mono Crystal	CVD Diamond	PCD	WC (K10)
Thermal conductivity (W/mK)	2000	2000	1000	560	110
Hardness (GPa)	50~100	50~100	80~100	50	18
Toughness (MPam-m ^{¹/₂})	3.4	3.4	5~6	8~9	10.5
Tensile strength (Gpa)	1000~3000	1000~3000	400~800	1260	-
Compressive strength (Gpa)	9	9	16	7.6	6.1
TRS (Gpa)	2.9	2.9	1.3	1.2	2.4

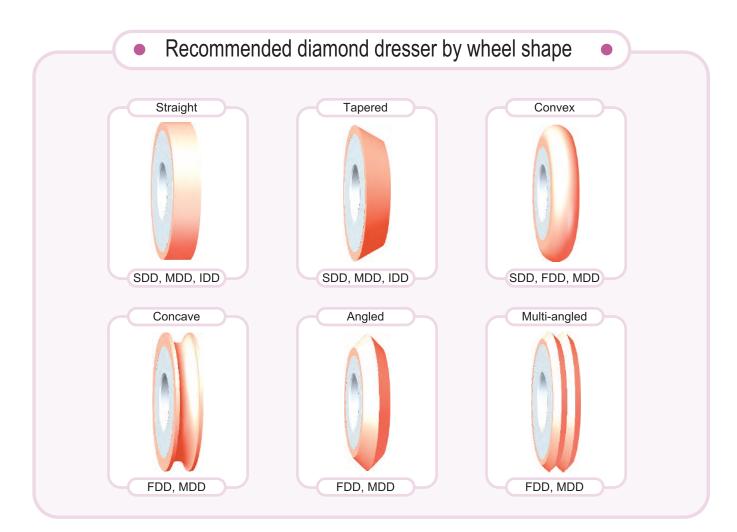



Single-point diamond dressers :

Single-point diamond dressers are versatile and economical to dress straight type conventional abrasive wheels. Customers can choose diamond carat and materials dependent upon working conditions such as wheels size, wheel width, depth of cut, etc.

Recommended Depth of Cut :

Recommended Diamond Carat :

Wheel Diameter $100 \sim 150$: 1/7 ct Wheel Diameter $175 \sim 250$: 1/5 ct Wheel Diameter $300 \sim 350$: 1/4 ct Wheel Diameter $350 \sim 400$: 1/3 ct Wheel Diameter $400 \sim 500$: 1/2 ct Wheel Diameter $500 \sim 600$: 3/4 ct Wheel Diameter $600 \sim$: 1 ct

Natural



Synthetic



Available diamond :

Available diamond :

F (Mono Crystal)

G(CVD)


- A (Octahedron)
- B (Dodecahedron)

Available carat :

Max 1 ct ~ Min 1/30 ct


Available size : 0.6 mm X 0.6 mm X 3 mm 0.8 mm X 0.8 mm X 3 mm 1.0 mm X 1.0 mm X 3 mm 1.5 mm X 1.5 mm X 3 mm

Specifications




	D1	L1
Standard	12	90

SDD-A03




	Pich	L	S	Е
Standard	M8X1.0	16	1.0	2




	L	D	S	E
Standard	50	10	1.5	2

SDD-A09




	D1	L1	L2	D2	V
Standard	18	60	42	12	MT1

Specifications




		DZ	וט	
25	42	8	12	Standard
	42	8	12	Standard



	D1	D2	L1	L2	W
Standard	16	11	37	22	14

SDD-A18 🔴




	D1	D2	L1	L2	W
Standard	16	11	29	15	14

• SDD-A12 •

	D1	D2	L1	L2	L3
Standard	10	8	43	22	8

SDD-A14



	D1	D2	D3	L1	L2	L3
Standard	16	11	8	34	19	8





orming Diamond Dressers :

Forming diamond dressers are used for dressing specific forms into conventional abrasive wheels requiring longer tool life.


Natural diamonds have very high resistance while they could be easily broken and have unsteady tool life. On the other hand, synthetic diamonds have steady tool life. Generally, the bigger radius of diamonds can ensure longer tool life. However, the much bigger radius can get grinding wheels to be burned because it makes the grinding wheels' grit blunt.

Recommended angle and radius (For chisel dresser) Rough grinding : R 0.3~0.5, 50° ~ 60° Finish grinding : R 0.1~0.25 , 30° ~ 45°




Roof





Available carat : Max 3/4 ct ~ Min 1/4 ct

Chisel



Available diamond : D (Maccle), E (Shape),

F (Mono crystal), G (CVD)


Available carat : Max 3/4 ct ~ Min 1/4 ct

Cone




Available diamond : C (Elongated), G (CVD) Available carat : Max 1/2 ct ~ Min 1/4 ct


Specifications



	D1	L	V	R
Standard	11	30	90	0.3

FDD-C14






FDD-C13

	D1	D2	L1	V	R
Standard	15	11	23	90	0.3

FDD-C19 🔵



	D	L	V	R
Standard	11	46.5	70	0.3

 \Box

V

55

V

55

V

60

R


0.3

R

0.2

R

0.2

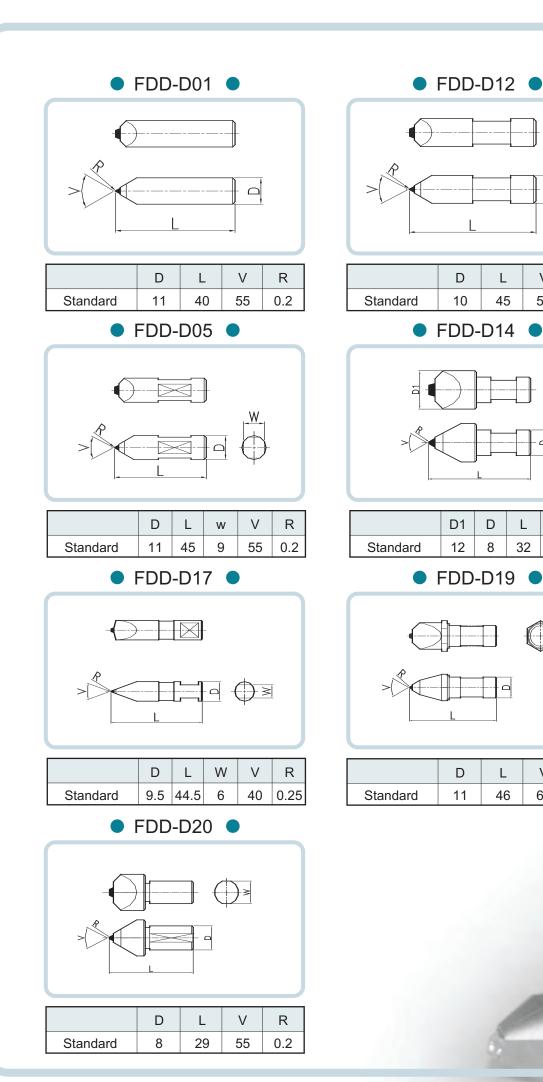



Vulti Diamond Dressers :

Two or more selected diamonds are set in a metal matrix to provide multi diamond points for dressing larger and wider conventional abrasive wheels. Multi-point diamond dressers have two types. One is a general type for dressing straight type conventional abrasive wheels; the other a blade type for dressing larger and conventional abrasive profile wheels at lower cost.

Multi-point diamond dressers using diamonds made by chemical vapor deposition are suited to get high quality surface finish and consistent performance. On the other hand, multi-point diamond dressers made of elongated natural diamonds, which is called "Fliesen tool", have longer tool life.

Natural



- Available diamond :
- A (Octahedron),
- B (Dodecahedron)

Blade type





Available size :


Available carat :


Max 1/3 ct ~ Min 1/30 ct


CVD 0.4 mm X 0.4 mm X 5 mm CVD 0.6 mm X 0.6 mm X 5 mm CVD 0.8 mm X 0.8 mm x 3 mm CVD 0.8 mm X 0.8 mm X 6 mm CVD 1.0 mm X 1.0 mm X 3 mm


Elongated 1/20 ct ~ 1/80 ct


Specifications











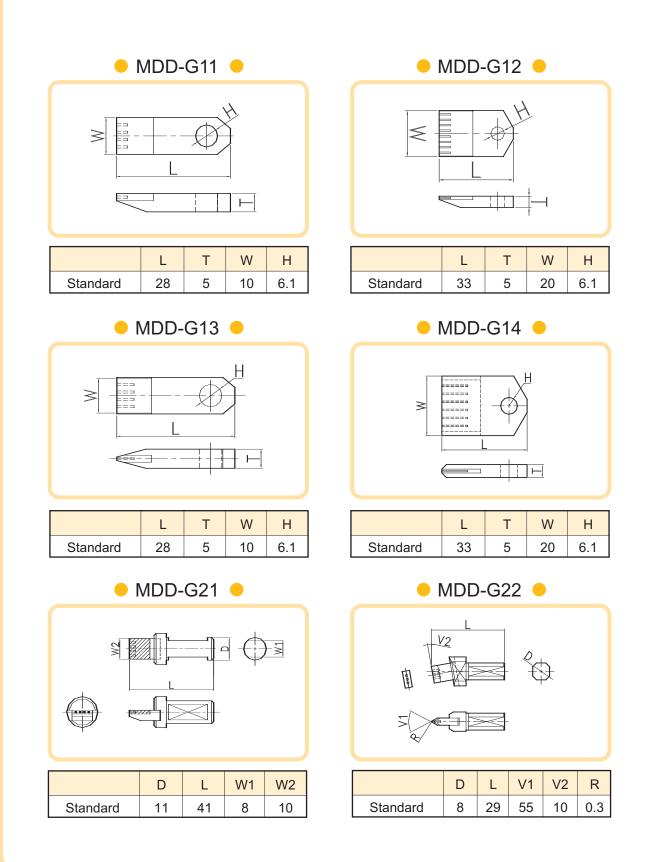

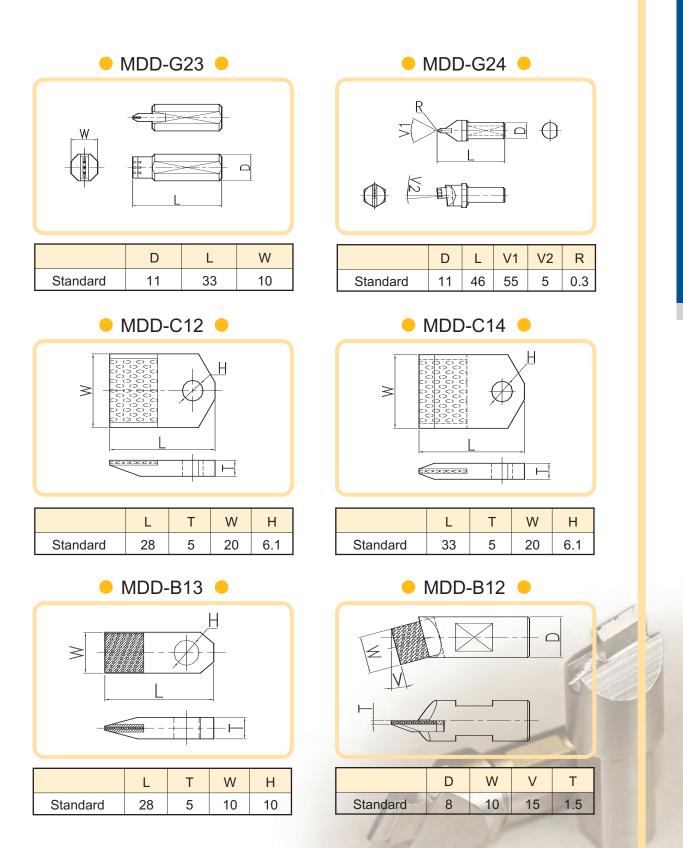

DIAMOND DRESSER

ZENESIS[®] TECHNOLOGY



mpregnated Diamond Dressers :

Impregnated diamond dressers have tiny diamond particles bonded in metal matrix. Dressing force is spread across the fine diamonds; impregnated diamond dressers can achieve longer tool life at lower cost.

Randomly distributed impregnated diamond dressers cannot optimally show their performance as required. That is why Ehwa has developed patterned impregnated diamond dressers manufactured with **ZENESIS**^{*} technology for dressing with precision.

ZENESIS[®] IDD

(Patterned Impregnated Diamond Dresser) Patent no. 10-0428947 / US 6626167

- Suitable for longer tool life and better performance
- Available mesh : # 20 ~ # 60




Impregnated Diamond Dresser

- Used for economical dressing
- Available mesh : #20 ~#140




Specifications

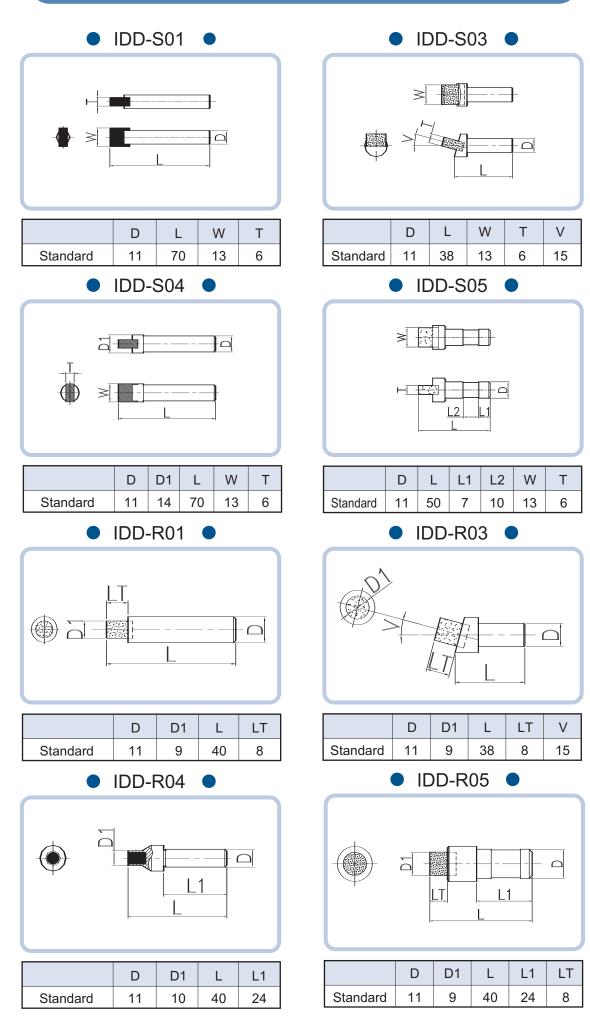


Burnishing tools

Burnishing tools are manufactured by natural or mono crystalline diamonds. The burnishing process is a cold process using proper pressure without removal of the work pieces. The burnishing tools are very useful for metalworking because they help get high quality mirror-like surface finish and meet dimensions as requested. The diamond burnishing tools can ensure longer tool life and good surface finish.

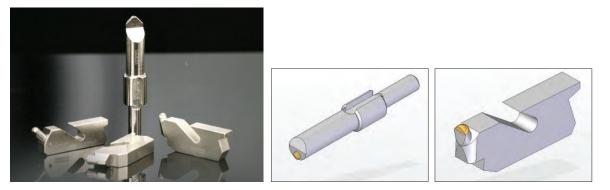

PCD (Poly-crystalline diamond) dressers

PCD dressers are cost-effective alternative in dressing conventional abrasive profile wheels. The PCD is easier to get desired shapes than the other diamond materials. As a result, PCD dressers can dress grinding wheels with complex profiles. The relatively lower tool life can be compensated by lower price.

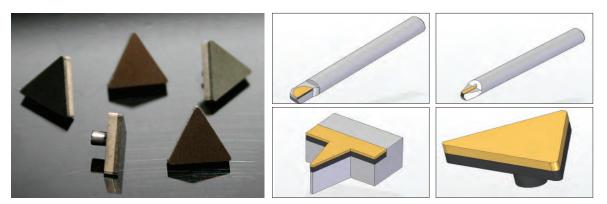

Contact gauges

Contact gauges with natural diamonds or poly-crystalline diamonds have almost 100 times longer tool life than tungsten carbides or high-speed steel. The diamond contact gauges can ensure highly accurate measurement with ultra wear resistance.







LOCATIONS

Korea









Factory Pyungtaek





Factory Oksan

Overseas



Factory Weihai, China

-Factory Shanghai, China









IT IT THE REAL ST TRADET



dil Linia









DIAMOND DRESSERS



EHWA DIAMOND INDUSTRIAL CO., LTD.

520-2, Won-dong, Osan-city, Gyeonggi-Do, Korea (447-804) http://www.ehwadia.com / e-mail : bkkim@ehwadia.co.kr Tel : +82-(31) 370 -9220 / Fax : +82-(31) 374-9840